BELGIQA
ARCHITECTURAL WOOD PRODUCTS

TECHNICAL DATA SHEET - NICOLAS SCHUYBROEK COLLECTION

WOOD FLOORING

BQ-NS02 NATURAL HUSK

001 PRODUCT DESCRIPTION

Wood type	Superba T.
Grading	A grade
Core/backing	2-ply: Superba T. on birch plywood
Coating	Multiple reactive stains finished with hardwax oil
Texture	Brushed
Bevel	Micro-V or Micro-V 4 sides for patterns
Patterns	Traditional, chevron, herringbone, NS Signature collection patterns

		Traditional planks
	Thickness/surface	18/5 mm 0.71” / 0.20”
	Width	280 mm 11.02”
	Length	2000 - 3000 mm (XXL on demand) 78.74”–118.11”

		Herringbone	45° Chevron
	Thickness/surface	18/5 mm 0.71” / 0.20”	18/5 mm 0.71” / 0.20”
	Width	140 mm 5.51”	140 mm 5.51”
	Length	700 mm 27.56”	660 mm 25.98”







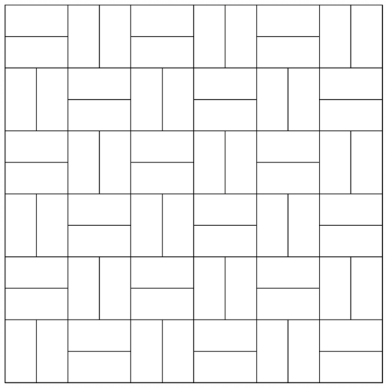

01 PARALLEL FORM

280 x 560 mm - 11.02” × 22.05”

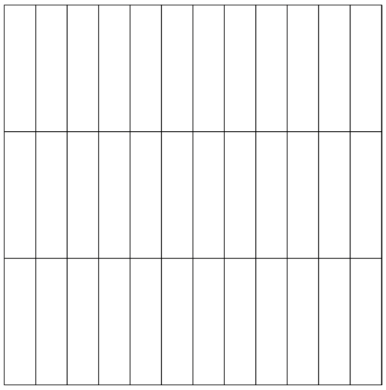

02 LINEAR FORM

280 x 1120 mm - 11.02” × 44.09”

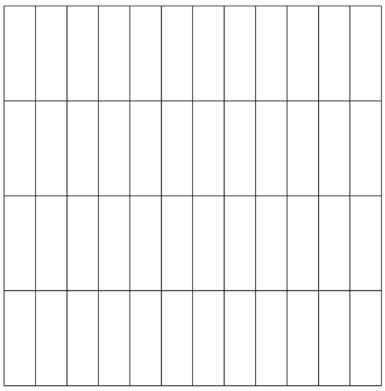

03 SILENT LINES

280 x 840 mm - 11.02” × 33.07”

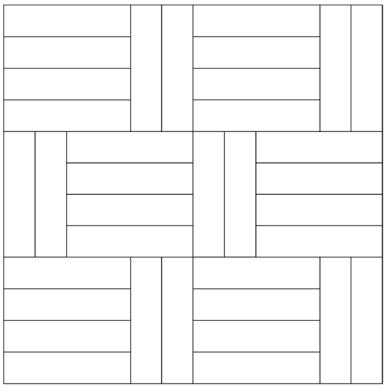

04 LAYERED PLANE

280 x 1120 mm - 11.02” × 44.09”

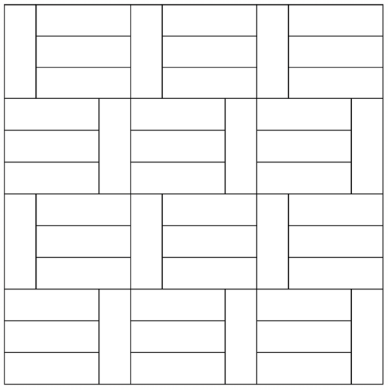

05 FRAMED FORM

280 x 840 mm - 11.02” × 33.07”

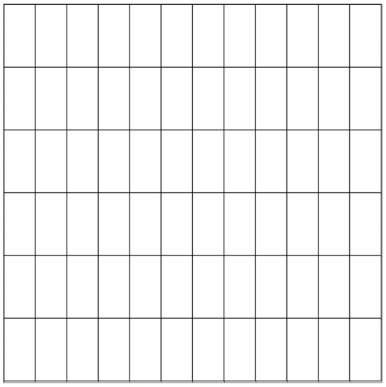

06 ORDERED LINES

280 x 560 mm - 11.02” × 22.05”

004 TECHNICAL PERFORMANCE

Norm	En 14342
FSC	FSC® (C129924)
Formaldehyde emission class	Carb2
Flammability class	Dfl-s1
Underfloor heating	Yes - Warranty certificate available
Floor cooling	Yes - Warranty certificate available
Thermal conductivity	0.17 W/mK
Moisture content	7 % (+/- 2%)
Advisory use	Suitable for: residential, commercial

004 ADDITIONAL INFORMATION

Installation	Glued down
Jointing	Tongue and groove
Sanding	Yes (1 mm per sanding)